

**PTR46-2D/2D**  
with optional s/s shelves.



Pass through reach-in for high turnover kitchen.

### STANDARD FEATURES

Insulation	Polyurethane foam injected under 500 tons of pressure to ensure uniformity and high structural strength.
Finish	Tough, hygienic construction, exterior bodies are stainless steel no.4 finish. Door frame and mullion are of 430 grade stainless steel for magnetic gaskets. Interior is stainless steel 2B finish. Zinalume steel top and base.
Door	Self closing door with easily replaceable magnetic gasket. Choice of model with full or half stainless steel door.
Refrigerator system	Self-contained, easily removable, top mounted condensing unit. Fitted with condensate evaporator, no drain connection required.
Controller	Multi-function microprocessor controlled with digital thermometer display.
Refrigerant	Environmental friendly R134a.
Shelf	Complete with 3 PVC. coated wire shelves per full door.
Other features	Coved stainless steel floor pan. Interior light. Heavy duty, adjustable, stainless steel bullet feet. Left hinge or right hinge selectable.
Optional extra	<ul style="list-style-type: none"> <li>Stainless steel wire shelves.</li> <li>Remote condensing unit.</li> <li>Mullion heater.</li> <li>Stainless steel base.</li> <li>Locking plate or cylinder locks.</li> <li>Swivel castors.</li> </ul>






Detail : 1



Detail : 2

Dimension :

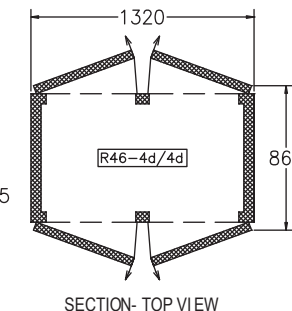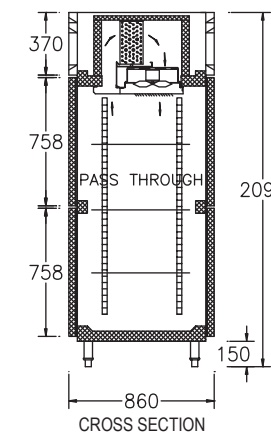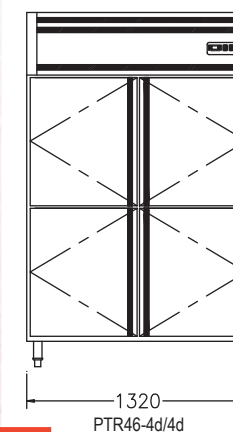

### TECHNICAL DATA

	PTR21-1D/1D	PTR46-2D/2D	PTR72-3D/3D
Full door model	PTR21-1D/1D	PTR46-2D/2D	PTR72-3D/3D
Half door model	PTR21-2d/2d	PTR46-4d/4d	PTR72-6d/6d
Dimension L x D x H (mm.)	680 x 880 x 2095	1320 x 860 x 2095	1975 x 860 x 2095
Capacity Cu.Ft	20/566	43/1220	66/1870
Temperature range	+2°C to +5°C		
Cooling capacity (Btu.)	1355	2672	3845
Compressor (Hp.)	1/6	1/3	1/2
Shelves	3	6	9
Defrosting system	Circulated air		
Power supply	220 / 50 / 1 Ph.(60 Hz models are available.)		

Dealer :



Continued product improvement is **WELBILT** Manufacturing (Thailand) Ltd., policy. Specifications are subject to change without notice.

