

KOLDTECH

The Technology of Excellence

Popular base mounted mini-mart showcase

Upright Showcase Unit

BSR-SERIES » Base mounted mini-mart display unit



BSR-2

STANDARD FEATURES

Insulation	Polyurethane foam injected under 500 tons of pressure to ensure uniformity and high structural strength, 60 mm. thick.
Finish	Interior and exterior white Colorbond steel (Food grade), Zinalume top, base and back.
Glass door	Double pane glass door, with 3mm heat reflective coated glass, self closing door with easily replaceable magnetic door gasket. Freezer are fitted with heated glass anti-sweat mullion heater.
Refrigerator system	Bottom mounted condensing unit or optional remote system. Fitted with condensate evaporator, no drain connection required.
Controller	Multi-function microprocessor controlled with digital thermometer display.
Refrigerant	<ul style="list-style-type: none"> Refrigerator (R) R134a CFC free
Shelf	Complete with 5 pcs. PVC coated wire shelves per full door.
Leg / caster	Adjustable, stainless steel bullet feet.
Other features	Coved stainless steel floor pan.
Optional extra	<ul style="list-style-type: none"> Remote condensing unit. Mullion heater for refrigerator. Swivel caster wheel. Additional shelves. Choice of door opening direction.



Detail : 1




Detail : 2


Dimension :



BSR-1

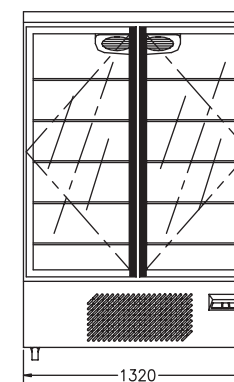

BSR-2

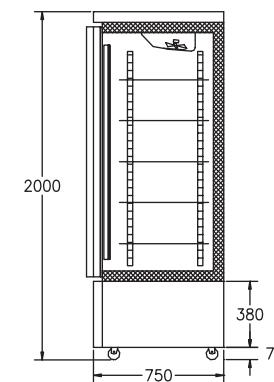

CROSS SECTION

TECHNICAL DATA

Model number	BSR-1	BSR-2	BSR-3
Dimension - LxDxH (mm)	680 x 810 x 2000	1320 x 810 x 2000	1975 x 810 x 2000
Temperature range		2 °C to 5 °C	
Cabinet capacity Cu. Ft / Litres.	18/520	40/1151	63/1783
Cooling capacity (Btu.)	1703	3125	4528
Compressor (Hp.)	1/6	1/3	1/2
Shelves	5	10	15
Interior light (w)		36 x 2	
Defrosting system		Circulated air	

Note : 60 Hz models are available

Dealer :



Continued product improvement is **WELBILT** Manufacturing (Thailand) Ltd., policy. Specifications are subject to change without notice.

CAT-BSR-0308-02