

DT-R21F21-2D



High performance dual temperature unit.

STANDARD FEATURES	
Insulation	Polyurethane foam injected under 500 tons of pressure to ensure uniformity and high structural strength.
Finish	Tough, hygienic construction, exterior bodies are stainless steel no.4 finish. Door frame and mullion are of 430 grade stainless steel for magnetic gaskets. Interior is stainless steel 2B finish. Zincalume steel top, base and back.
Door	Choices of full door or half stainless steel door models. Mullion heater for freezer section. Self closing door with easily replaceable magnetic gasket.
Refrigerator system	Self contained, easily removable, top mounted condensing unit. Fitted with condensate evaporator, no drain connection required.
Controller	Multi-function microprocessor controlled with digital thermometer display.
Refrigerant	• R404a for freezer • R134a for chiller
Shelves / GN pan	Stainless steel angle slide to suit PVC coated wire shelves or GN 2/1 pan size.
Other features	Coved stainless steel floor pan. Interior light. Heavy duty, adjustable, stainless steel bullet feet. Left hinge or right hinge selectable.
Optional extra	<ul style="list-style-type: none"> • Stainless steel wire shelves. • Remote condensing unit. • Mullion heater for chiller section. • Stainless steel base and back. • Locking plate or cylinder locks. • Swivel castors.




Detail : 1



Detail : 2

Dimension :

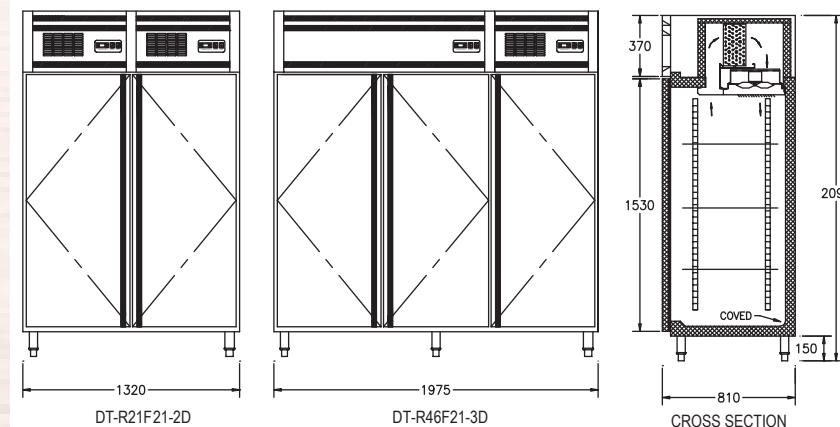

TECHNICAL DATA	Refrigerator		Freezer		Refrigerator		Freezer		Refrigerator		Freezer	
	DT-R10F10-2D	DT-R21F21-2D	DT-R21F21-2D	DT-R46F21-3D	DT-R21F46-3D	DT-R10F10-2D	DT-R21F21-2D	DT-R46F21-3D	DT-R21F46-3D	DT-R10F10-2D	DT-R21F21-2D	DT-R46F21-3D
Model number	DT-R10F10-2D		DT-R21F21-2D		DT-R46F21-3D		DT-R21F46-3D		DT-R10F10-2D		DT-R21F21-2D	
Dimension - L x D x H (mm.)	680 x 810 x 2095		1320 x 810 x 2095		1975 x 810 x 2095		1975 x 810 x 2095		680 x 810 x 2095		1320 x 810 x 2095	
Capacity Cu.Ft / Ltr	10/280		20/566		43/1220		20/566		20/566		43/1220	
Cooling capacity (Btu.)	751	962	1355	1720	2672	1720	1355	3241	751	962	1355	1720
Temperature range	2°C to 5°C	-18°C to -20°C	2°C to 5°C	-18°C to -20°C	2°C to 5°C	-18°C to -20°C	2°C to 5°C	-18°C to -20°C	2°C to 5°C	-18°C to -20°C	2°C to 5°C	-18°C to -20°C
Compressor (Hp.)	1/8	1/3	1/6	3/4	1/3	3/4	1/6	1	1/8	1/3	1/6	3/4
Shelves	2		6		9		9		2		6	
Mullion heater (w)	-	40	-	62	-	62	-	124	-	40	-	62
Defrosting system	Circulated air	Electric	Circulated air	Electric	Circulated air	Electric	Circulated air	Electric	Circulated air	Electric	Circulated air	Electric
Power supply	220 / 50 / 1 Ph. (60 Hz models are available.)											

Dealer :



Continued product improvement is **WELBILT** Manufacturing (Thailand) Ltd., policy. Specifications are subject to change without notice.

CAT-DT-0909-04