

DT-R21F21-2D



High performance dual temperature unit.

STANDARD FEATURES

| | |
|---------------------|--|
| Insulation | Polyurethane foam injected under 500 tons of pressure to ensure uniformity and high structural strength. |
| Finish | Tough, hygienic construction, exterior bodies are stainless steel no.4 finish. Door frame and mullion are of 430 grade stainless steel for magnetic gaskets. Interior is stainless steel 2B finish. Zincalume steel top, base and back. |
| Door | Choices of full door or half stainless steel door models. Mullion heater for freezer section. Self closing door with easily replaceable magnetic gasket. |
| Refrigerator system | Self contained, easily removable, top mounted condensing unit. Fitted with condensate evaporator, no drain connection required. |
| Controller | Multi-function microprocessor controlled with digital thermometer display. |
| Refrigerant | • R404a for freezer • R134a for chiller |
| Shelves / GN pan | Stainless steel angle slide to suit PVC coated wire shelves or GN 2/1 pan size. |
| Other features | Coved stainless steel floor pan. Interior light. Heavy duty, adjustable, stainless steel bullet feet. Left hinge or right hinge selectable. |
| Optional extra | <ul style="list-style-type: none"> • Stainless steel wire shelves. • Remote condensing unit. • Mullion heater for chiller section. • Stainless steel base and back. • Locking plate or cylinder locks. • Swivel castors. |




Detail : 1



Detail : 2

Dimension :

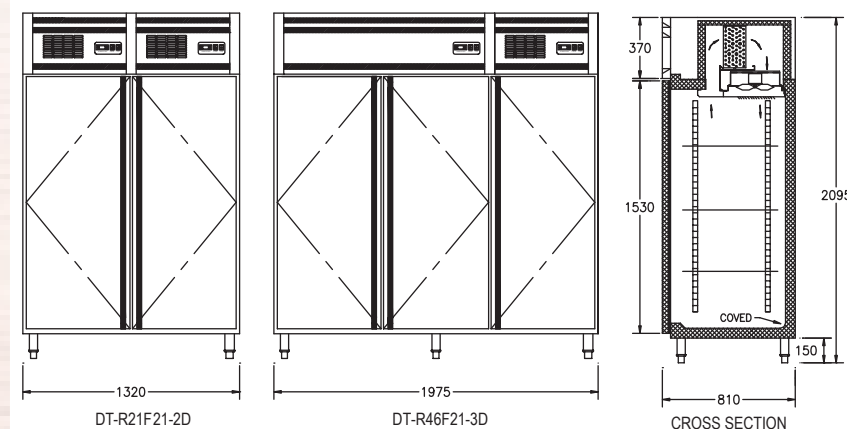

| TECHNICAL DATA | Refrigerator | Freezer | Refrigerator | Freezer | Refrigerator | Freezer | Refrigerator | Freezer |
|-----------------------------|--|----------------|-------------------|----------------|-------------------|----------------|-------------------|----------------|
| Model number | DT-R10F10-2D | | DT-R21F21-2D | | DT-R46F21-3D | | DT-R21F46-3D | |
| Dimension - L x D x H (mm.) | 680 x 810 x 2095 | | 1320 x 810 x 2095 | | 1975 x 810 x 2095 | | 1975 x 810 x 2095 | |
| Capacity Cu.Ft / Ltr | 10/280 | | 20/566 | | 43/1220 | 20/566 | 20/566 | 43/1220 |
| Cooling capacity (Btu.) | 751 | 962 | 1355 | 1720 | 2672 | 1720 | 1355 | 3241 |
| Temperature range | 2°C to 5°C | -18°C to -20°C | 2°C to 5°C | -18°C to -20°C | 2°C to 5°C | -18°C to -20°C | 2°C to 5°C | -18°C to -20°C |
| Compressor (Hp.) | 1/8 | 1/3 | 1/6 | 3/4 | 1/3 | 3/4 | 1/6 | 1 |
| Shelves | 2 | | 6 | | 9 | | 9 | |
| Mullion heater (w) | - | 40 | - | 62 | - | 62 | - | 124 |
| Defrosting system | Circulated air | Electric | Circulated air | Electric | Circulated air | Electric | Circulated air | Electric |
| Power supply | 220 / 50 / 1 Ph. (60 Hz models are available.) | | | | | | | |

Dealer :



Continued product improvement is **WELBILT** Manufacturing (Thailand) Ltd., policy. Specifications are subject to change without notice.