




R46-4D  
with optional cylinder locks

All time favourite model which becomes industry standard.

STANDARD FEATURES	
Insulation	Polyurethane foam injected under 500 tons of pressure to ensure uniformity and high structural strength.
Finish	Tough, hygienic construction, exterior bodies are stainless steel no.4 finish. Door frame and mullion are of 430 grade stainless steel for magnetic gaskets. Interior is stainless steel 2B finish. Zincalume steel top, base and back.
Door	Choices of full door or half door stainless steel or full door or half door double pane 3 mm. heat reflective insulated glass. Self closing door with easily replaceable magnetic gasket. Mullion heater standard for freezer units but option for refrigerator.
Refrigerator system	Self-contained, easily removable, top mounted condensing unit. Fitted with condensate evaporator, no drain connection required.
Controller	Multi-function microprocessor controlled with digital thermometer display.
Refrigerant	• R404a for freezer • R134a for chiller
Shelves / GN pan	Complete with 3 pcs. PVC coated wire shelves per full door. Stainless steel angle slide, suit GN 2/1 pan size.
Other features	Coved stainless steel floor pan. Interior light. Heavy duty, adjustable, stainless steel bullet feet. Left hinge or right hinge selectable.
Optional extra	<ul style="list-style-type: none"> <li>• Stainless steel wire shelves.</li> <li>• Remote condensing unit.</li> <li>• Stainless steel base and back.</li> <li>• Locking plate or cylinder locks.</li> <li>• Mullion heater for refrigerator.</li> <li>• Swivel castors.</li> <li>• Double pane heat reflective glass door.</li> </ul>

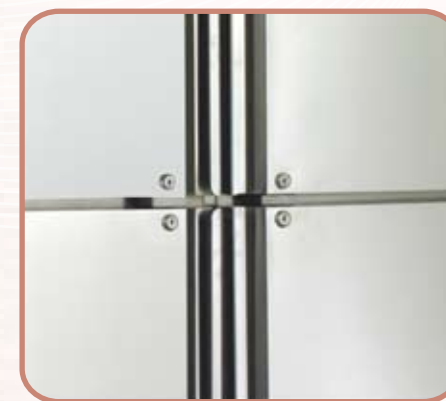


Detail : 1



Detail : 2

Dimension :

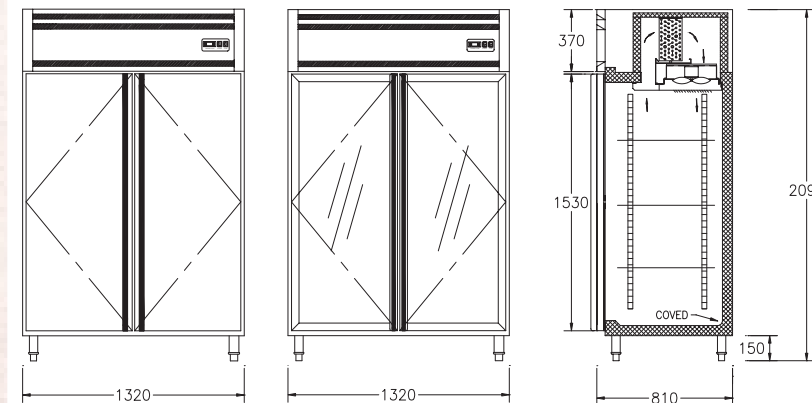

TECHNICAL DATA	Refrigerated models			Freezer models		
	R21	R46	R72	F21	F46	F72
Model number	R21	R46	R72	F21	F46	F72
Dimension - L x D x H (mm.)	680 x 810 x 2095	1320 x 810 x 2095	1975 x 810 x 2095	680 x 810 x 2095	1320 x 810 x 2095	1975 x 810 x 2095
Capacity Cu.Ft / Litres	20/566	43/1220	66/1870	20/566	43/1220	66/1870
Temperature range	2 °C to 5°C			-18 °C to -20 °C		
Cooling capacity (Btu.)	1355	2672	3845	1720	3241	4586
Compressor (Hp.)	1/6	1/3	1/2	3/4	1	2
Shelves	3	6	9	3	6	9
Mullion heater (full/half doors)	Optional			82 / 124W	124 / 164W	186 / 246W
Defrosting system	Circulated air			Electric		
Power supply	220 / 50 / 1 Ph. (60 Hz models are available.)					

Dealer :



Continued product improvement is **WELBILT** Manufacturing (Thailand) Ltd., policy. Specifications are subject to change without notice.