



Sanwich preparation unit with flexible configuration.



Optional Cylindrical lock




Digital controller

### STANDARD FEATURES

Insulation	CFC free Polyurethane foam injected under 500 tons of pressure to ensure uniformity and high structural strength.
Finish	Tough, hygienic construction, stainless steel interior and exterior, zincalume steel top base and back.
Door	Doors are self closing with easy replaceable magnetic gaskets.
Refrigerator system	Mono-Block self contained refrigeration system, designed for easy service. System can be easily removed and replaces with a spare unit. Fitted with condensate evaporator, no drain connection required.
Controller	Microprocessor controlled with digital display.
Optional Extra	<ul style="list-style-type: none"> <li>• Cutting Board</li> <li>• S/S Shelf</li> <li>• Cylindrical or plate lock</li> <li>• Caster wheel</li> <li>• GN 1/6 Pan</li> </ul>

Dimension :

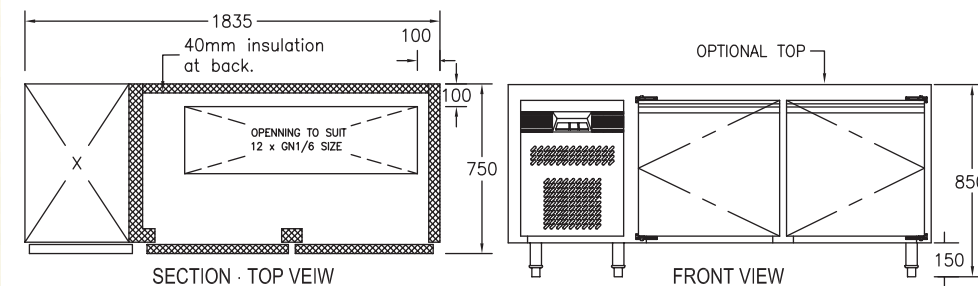

### TECHNICAL DATA

#### Refrigerated Models

Model number	SUR-GN1-1435	SUR-GN1-1885
Dimension L x D x H (mm.)	1435 x 765 x 850	1885 x 765 x 850
Capacity ( ltr.)	329	527
Temperature range	2 °C to 5 °C	
Refrigerant	R - 404 a	
Cooling capacity (Btu.)	1034	1491
Condensing unit (Hp.)	1/8	1/6
PVC. coated wire shelves	2	3
Pan (Optional)	6 - GN 1/6 - 100 mm.	12 - GN 1/6 - 100 mm.
Power supply	220 V / 50 Hz / 1 Ph.	

Dealer :



Continued product improvement is **WELBILT** Manufacturing Ltd., policy. Specifications are subject to change without notice.