



Sanwich preparation unit with flexible configuration.



Optional Cylindrical lock




Digital controller

STANDARD FEATURES

Insulation	CFC free Polyurethane foam injected under 500 tons of pressure to ensure uniformity and high structural strength.
Finish	Tough, hygienic construction, stainless steel interior and exterior, zincalume steel top base and back.
Door	Doors are self closing with easy replaceable magnetic gaskets.
Refrigerator system	Mono-Block self contained refrigeration system, designed for easy service. System can be easily removed and replaces with a spare unit. Fitted with condensate evaporator, no drain connection required.
Controller	Microprocessor controlled with digital display.
Optional Extra	<ul style="list-style-type: none"> • Cutting Board • S/S Shelf • Cylindrical or plate lock • Caster wheel • GN 1/6 Pan

Dimension :

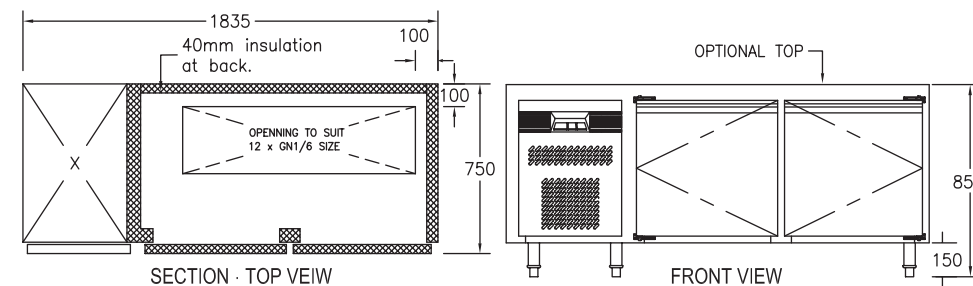

TECHNICAL DATA

Refrigerated Models

Model number	SUR-GN2-1085	SUR-GN2-1835	SUR-GN2-2485
Dimension L x D x H (mm.)	1085 x 765 x 850	1835 x 765 x 850	2485 x 765 x 850
Capacity (ltr.)	7.6/224	18/527	28/789
Temperature range	2 °C to 5 °C		
Refrigerant	R - 134 a		
Cooling capacity (Btu.)	1447	3030	4787
Condensing unit (Hp.)	1/8	1/6	1/6
PVC. coated wire shelves	1	2	3
Pan (Optional)	6 - GN 1/6 - 100 mm.	12 - GN 1/6 - 100 mm.	18 - GN 1/6 - 100 mm.
Power supply	220 V / 50 Hz / 1 Ph.		

Dealer :



CERTIFICATE NO. 34705



CERTIFICATE NO. 35913

Continued product improvement is **WELBILT** Manufacturing (Thailand) Ltd., policy. Specifications are subject to change without notice.