

WITH TROLLEY

AFCH x H




1 compartment for trolley height max. 1730 mm
 Polyurethane foam panels (45kg/m³), 60mm thick
 Food grade lacquered steel skin (stainless steel optional)
 Stainless steel floor
 Stainless steel racks and sleeper guides adjustable every 15mm
 Removable power unit hood for platform access.
 Tropicalized refrigerating unit.
 Easily removable door gasket
 Stainless steel handle with door protection
 Electronic control panel with on/off switch, with real-time programmer
 Cooling phase as standard
 On gliders

OPTIONS :

Probe electronic humidity
 Stainless steel exterior
 Condensate pan
 Pair of stainless steel slideways
 Window per each door

* Other model, please consult us.

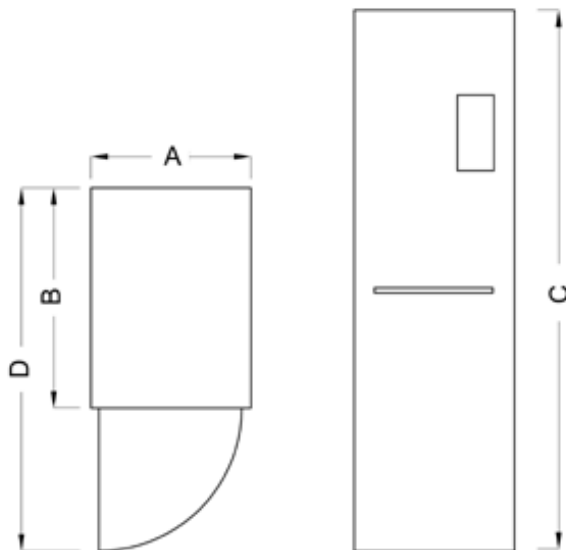

MODEL	AFCH64-H	AFCH48-H	AFCH86-H
Grids for trolley			
mm	400x600	400x800	600x800
Dimensions			
A mm	660	660	870
B mm	910	1150	1150
C mm	2190	2230	2230
D mm	1500	1740	1950
Power			
kW	1		
CV	1/2		
Voltage			
MONO -220 V - 50 Hz			