

KOLDTECH

The Technology of Excellence

Display Showcase

RCD-SERIES » Cake Display

RCD - 15



Detail : 1



Detail : 2



Detail : 3

Classic all-time favourite display showcase.

STANDARD FEATURES


Refrigerator system	Self-contained, bottom mounted, using R134a as refrigerant. (for refrigerated models)
Controller	Microprocessor controlled with digital temperature display, humidity control (for refrigerated models)
Body & furnishing	Rust proof steel structure base and top with painted glass finish. Single pane side glass. S/S No. 4 finish base and edges. Polyurethane Foamed-in-place insulated bottom panels. Fluorescent light fixtures.
Shelves	Glass shelves with polished stainless steel shelf supports.

MODELS DESCRIPTION


RCD	Refrigerated display unit with double glazed front curved glass. Self closing sliding doors at rear with mirror finish to front.
ORCD	Refrigerated display unit with open front. Air curtain. Insulated back panel with stainless steel finish.
NRCD	Same as RCD but without refrigeration system, display product at ambient temperature.

TECHNICAL DATA	1200 mm.			1500 mm.			1800 mm.			2000 mm.		
Model number	RCD-12	ORCD-12	NRCD-12	RCD-15	ORCD-15	NRCD-15	RCD-18	ORCD-18	NRCD-18	RCD-20	ORCD-20	NRCD-20
Dimension - LxDxH (mm.)	1200 x 760 x 1290			1500 x 760 x 1290			1800 x 760 x 1290			2000 x 760 x 1290		
Temperature range	5°C to 15°C		Ambient	5°C to 15°C		Ambient	5°C to 15°C		Ambient	5°C to 15°C		Ambient
Cooling capacity (Btu.)	2088	5210	-	2484	6432	-	3337	8032	-	3600	8885	-
Compressor (Hp.)	1/2	1-1/4	-	3/4	1-1/4	-	1	2	-	1	2	-
Refrigerant	R 404a	R 404a	-	R 404a	R 404a	-	R 404a	R 404a	-	R 404a	R 404a	-
Glass shelves	2			2			2			2		
Display light (w)	30 x 4			36 x 4			58 x 4			58 x 4		
Power supply	220 v / 50 Hz / 1 Ph. (60 Hz models are available.)											
Optional extra	•Additional shelf with lighting.			•PU Insulated side panels.			•Single pane front glass.					

Dimension :

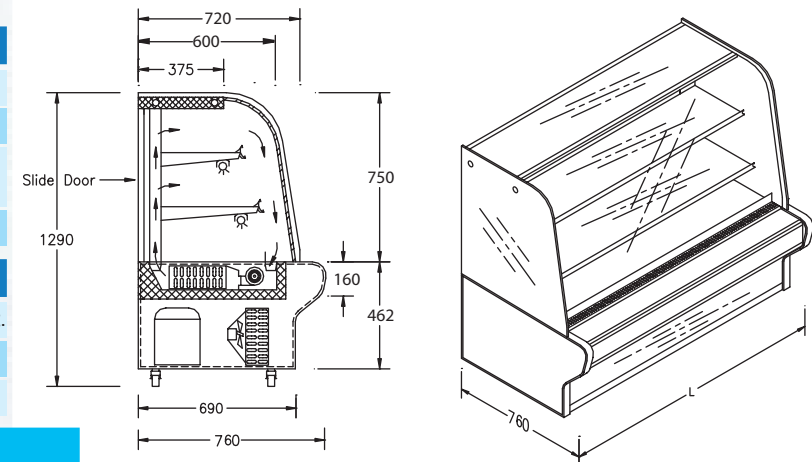

Dealer :

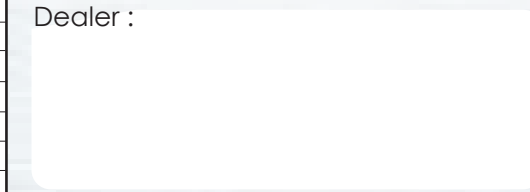

Continued product improvement is **WELBILT** Manufacturing (Thailand) Ltd., policy. Specifications are subject to change without notice.

CAT-RCD-0308-03